

Anutone launches two new acoustic series for 2018

Snazz Slate Series

Finally India gets acoustical ceiling tiles with glassfibre reinforced calcined silicate (GRCS) core. Anutone is pleased to introduce economical but effective ceiling tiles for government buildings with three dynamic surface finishes - Polka, Shimer and Spritz in the Snazz Slate Series.

The ceiling tiles sport densified edges of 14mm thickness with Steppe edge suitable for Skelet T15 grid of 600x600mm and a lightweight 7mm thickness at the centre. A supreme example of optimum utilisation of resources to meet intended outcomes.

The tiles are factory finished in natural white and can be further insitu painted to choice colours with acrylic emulsion without loss of acoustical ratings.

Snazz Slate Series

Slate Polka - Circular perfed in dual diameters

Slate Shimer - Micro perfs and leaf design

Slate Spritz - Pin and fissure perfs

TECHNICAL INFORMATION

Type	Grid
Finish	Plasters
Core	GRCS
Thickness (mm)	14mm (edge) 7mm (centre)
Size (mm)	595 x 595
Edge	Steppe Fine Bevel (for T15)
Weight (Kg/m2)	5
Fire (Class)	1 & P
NRC	upto 0.5
STC	upto 30
Thermal (W/mk)	0.04
Climate (0C, RH)	50, 99
Light (%)	85
Green (VoC, RC%)	Low, 35%
Warranty (Years)	3
Maintenance	Dry-wipe, Vacuum



Slate Polka – circular perfed in dual diameters



Slate Shimer – micro perfs and leaf design



Slate Spritz – pin and fissure perfs

Caution! Due to optical illusion some of the designs can look bubbled up but move your vision side to side or up to down and you will note the true indentations carefully embedded on the surface


Tufbloc Sircle Series

- Perforated Tufbloc ceiling tile
- Prepainted white or black
- Rugged, tough acoustics

TECHNICAL INFORMATION

Type	Grid
Finish	Plasters
Core	Magnesium
Thickness (mm)	8
Size (mm)	595 x 595
Density (Kg/m3)	1,000
Weight (Kg/m2)	8
Fire (Class)	1 & P
NRC**	upto 0.8
Thermal (W/mk)	0.12
Climate (°C, RH)	50, 99
Light (%)	High
Green (VOC, RC%)	Low, 35
Warranty (Years)	5
Maintenance	Paint, Wipe

** with SynthPF overlay

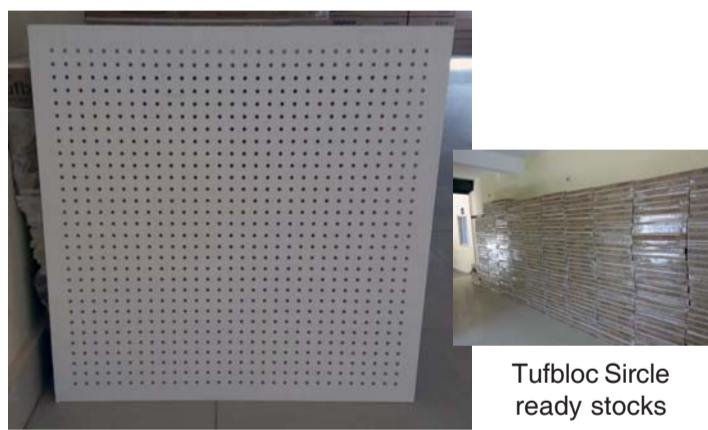

Tufbloc Sircle ready stocks

Perforated gypsum board can provide seamless, non-grid acoustics that looks good, sounds good. However gypsum suffers from generic deficiencies like low resistance to water, fire, termite and impact. Hence its acceptance and adoption for acoustical ceiling and panelling is limited

Enter perforated Tufbloc ... as in Tufbloc Sircle

Tufbloc Sircle gives you the dual benefits of a tough ceiling tile that is highly resistant to water, fire, termite, impact and also superior sound absorption. 6mm diameter circular perforations at 18mm pitch with white acoustical fleece. The RH99 rating is an added bonus!

50 years of manufacturing excellence and acoustical passion

www.anutone.com

Anutone Acoustics Limited, 3A Visvesvaraya Industrial Area, Bengaluru 560 048, India
Phones +9180 4084 3737 | +9180 2520 2803 | +9180 2520 3114 Email info@anutone.com

AMDAVAD • BHUBANESWAR • CHANDIGARH • CHENNAI • COIMBATORE • DEHRADUN • DELHI NCR • GOA • GUWAHATI • HYDERABAD • JAIPUR
KOCHI • KOLKATA • LUCKNOW • MUMBAI • NAGPUR • PATNA • PUNE • RAIPUR • RAJKOT • RANCHI • SURAT • VADODARA • VISAKHAPATNAM

Toll Free 1800 103 5505 (10am - 6pm Monday-Friday)



All logos and brand names are registered trademarks of their respective owners. To ensure delivery to your inbox, please add info@anutone.com to your address book. If you wish to stop receiving our emails, reply with Unsubscribe in the subject line to info@anutone.com.